

DOLLE

LOFT LADDER CLICKFIX® 56S

LOFT LADDER IN HIGH QUALITY AND EASY INSTALLATION FROM
DOLLE

Loft ladder clickFIX® 56S is part of the unique loft ladder line from DOLLE. The entire patented clickFIX® range is known by low u-value and the quick and easy installation. The insulation and the construction of the trapdoor reduces heat loss.

PRODUCT PROPERTIES

U-value	0,64
Insulation	50 mm

PRODUCT DESCRIPTION

Easy to install for trade professionals and DIY'ers

Thanks to its low weight and patented assembly technology with click modules, clickFIX® can also be easily installed by one person. It's simple, align the 190 mm high casing, screw in place, click on the trapdoor and ladder section and adjust to the room height, job done. To ensure a perfectly airtight installation.

High quality loft ladders form the transition from the living area to the loft space. In addition to a simple and safe installation process the clickFIX® also prevents the loss of energy preventing the escape of warm air from the living area. The patented loft ladder DOLLE clickFIX® 56S meets all requirements in one system: Thanks to its modular construction and easy installation along with excellent insulation properties the loft ladder has a component U-value of 0.64 W / m²K.

LOW U-VALUE

Also on the clickFIX® 56S the u-value is very low compared to other loft ladders on the market. Especially because all our clickFIX® loft ladders are tested as building component, like doors and windows.

CONTROL AIR LEAKAGE IN YOUR HOME

Vapour barrier with TwinActive-foil seals your product for optimal heat-insulation. Easy to attach.

Optional accessories:

Plastic feet, architraves and handrails are not included as standard.

Advantages:

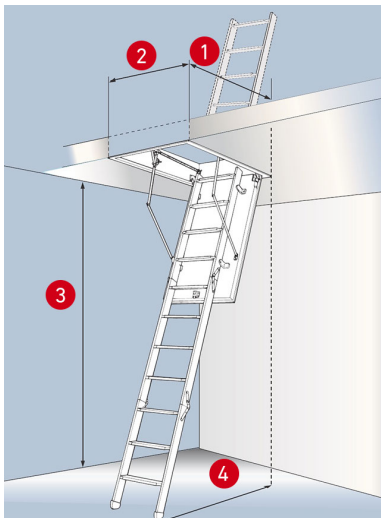
Easy 1-person installation process

Lightweight and easy to operate, handrail included

10-year guarantee

Maximum floor to ceiling height 274 cm

Energy efficient with a U-Value of 0.64 W / m²K.

TECHNICAL DATA**1 OPENING SIZE (LENGTH)**

120 cm

2 OPENING SIZE (WIDTH)

70 cm

3 FLOOR-TO-CEILING HEIGHT

279 cm

4 TOTAL GOING

111 cm

PRODUCT NUMBER

1039375

FINISH

White - RAL 9010

U-VALUE

0,64

LADDER MATERIAL

Wood

CASING MATERIAL

Spruce

TRAPDOOR MATERIAL

Sandwich construction

CASING (HEIGHT)

14 cm

MAXIMUM FLOOR-TO-CEILING HEIGHT

280 cm

MAXIMUM LOAD

150 kg

SWING CLEARANCE

148 cm

TESTED

U-value - tested as building component by testinstitute: IFT
Rosenheim, Airtight EN 12207 class 4, Manufactured
according to EN 14975

ATTIC LADDER TYPE

Folding ladder

USAGE

Manual

TREAD RISE

250 mm

TREAD THICKNESS

17,50 mm

TREAD WIDTH

400 mm

TREAD DEPTH

69 mm

TRAPDOOR THICKNESS

56 mm

STRING DEPTH

69 mm

STRING THICKNESS

21 mm

STRING MATERIAL

Pine

FIRE RESISTANCE CLASS

None

DOWNLOADS



[Installation instruction clickFIX 56 S](#)

CROSSELL PRODUCTS



Handrail for DOLLE loft ladders with 3 section ladder



Vapour barrier

dolle.com